

Gorm Sørensen

ProCal



ProCal - Gorm Sørensen

Sandshagan 11
Jessheim, N 2067

Gorm Sørensen


Telefon: +47 41 51 61 71
Epost: gorm@procal.no

ISF level II certified

THX level II video calibrator

Lyd&Bilde W1400

Telefon:
Epost:

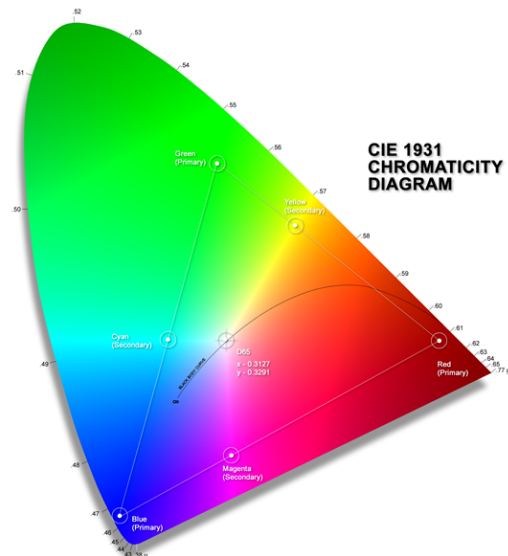



METER

Manufacturer:
Model:
Meter Serial:

SOURCE

Model:
Info:

DISPLAY / PROCESSOR

Model:
Type:
Info1:

CALIBRATION STANDARD

Nominal Signal Levels: True
Luminance Response Model: PowerFunction
Gamma: 2.2
Color Space Target: D65, HD Rec.709

Pre Calibration Settings

PictureMode: Standard
ColorTemp: D65
Gamma: 2.2
BackLight:
Brightness: 50 Contrast: 90
Color: 50 Tint: 50
Sharpness: 2

High

| Red | Green | Blue |
|-----|-------|------|
| 100 | 100 | 100 |

Low

| Red | Green | Blue |
|-----|-------|------|
| 256 | 256 | 256 |

Pre-Calibration Notes: default bildemodus: Standard

Post Calibration Settings

Picture Mode: Standard
ColorTemp: 6500K - custom
Gamma: 2.2
BackLight:
Brightness: 50 Contrast: 49
Color: 50 Tint: 50
Sharpness: 1

High

| Red | Green | Blue |
|-----|-------|------|
| 96 | 93 | 100 |

Low


| Red | Green | Blue |
|-----|-------|------|
| 260 | 260 | 260 |

Post-Calibration Notes: Kalibrert minne: Standard

Lampe: High
ColorSpace: BT709
CMS er kalibrert
Frame Interpolation: Low
FleshTone: 3


Pre Calibration Results

CollectionMax dE2000: 7.16



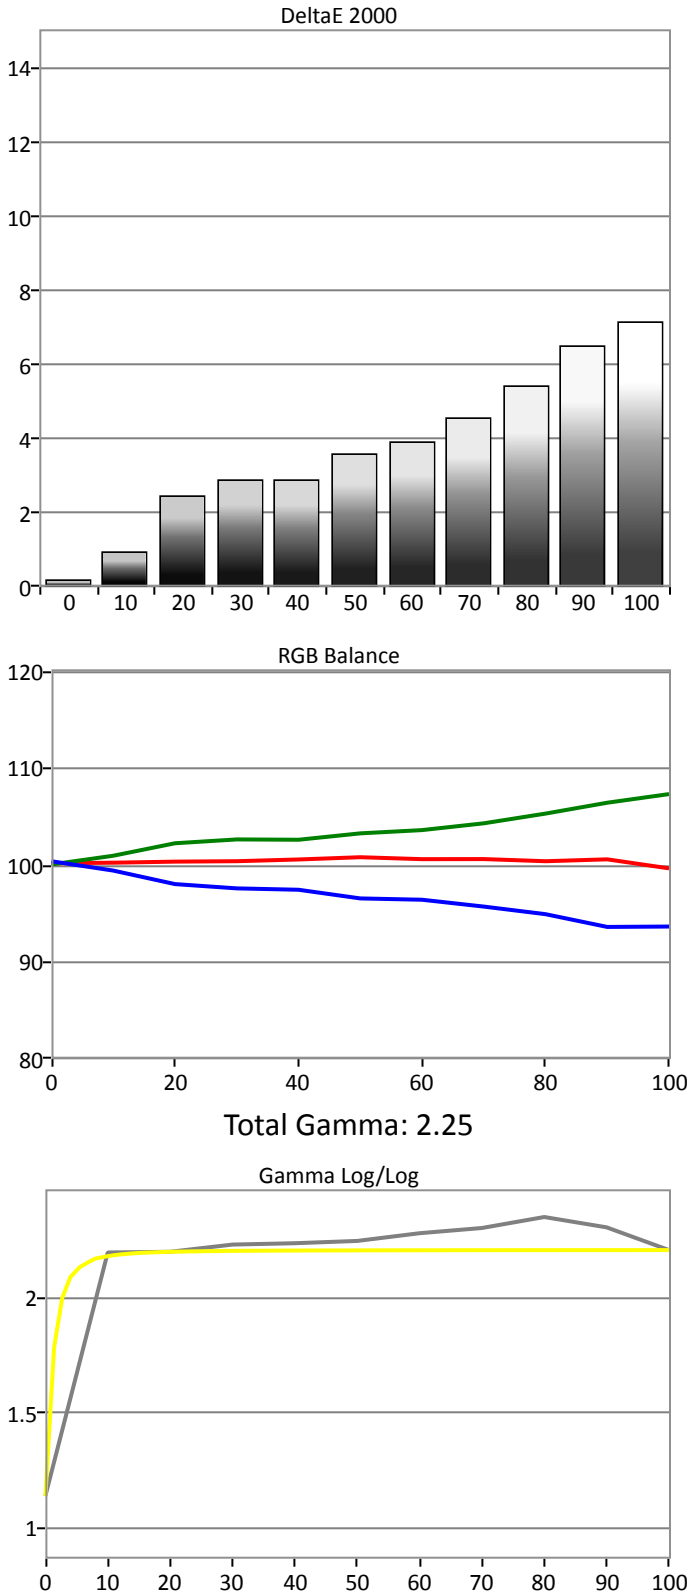


Post Calibration Results

CollectionMax dE2000: 0.93

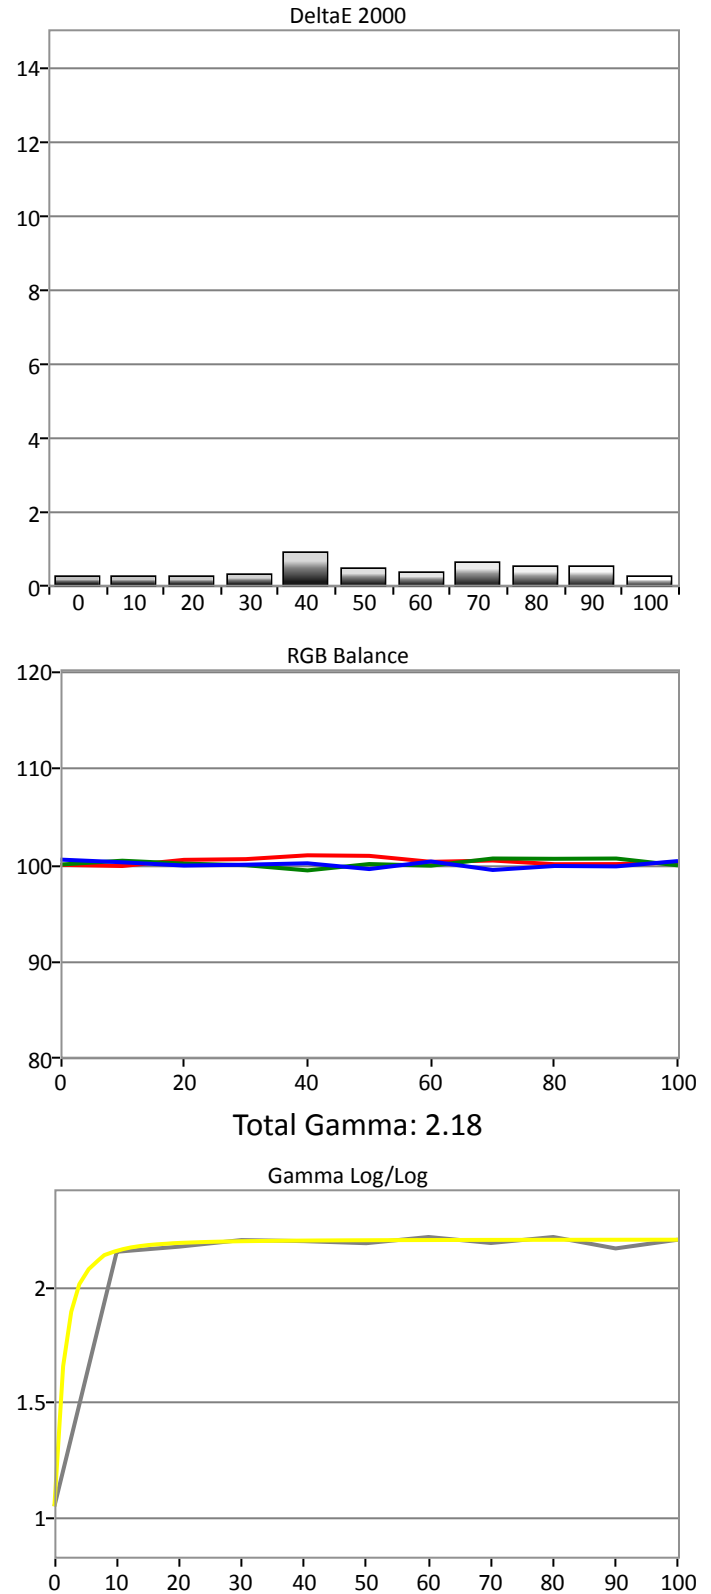

Pre Calibration Results

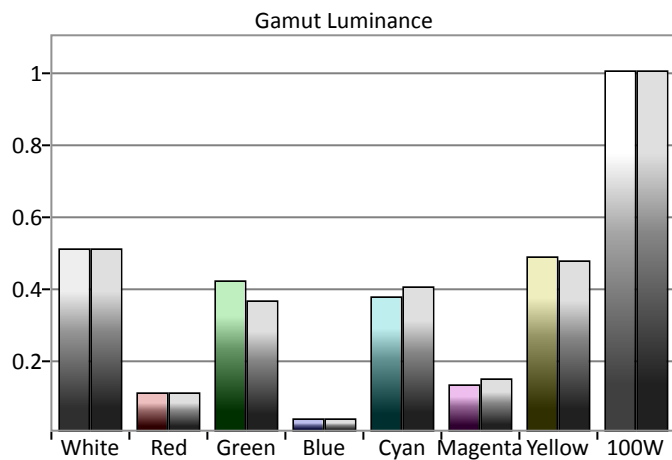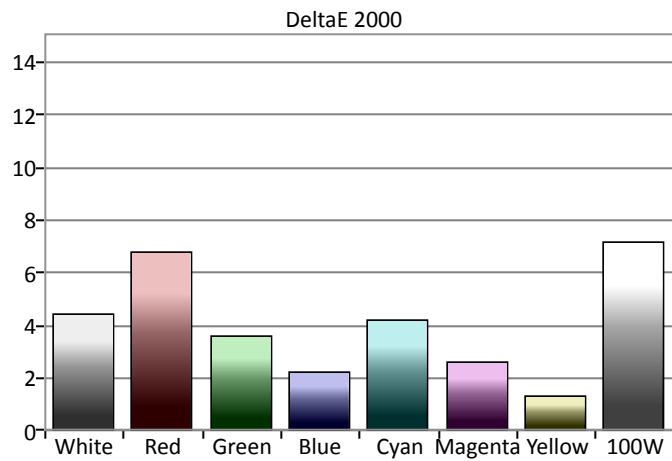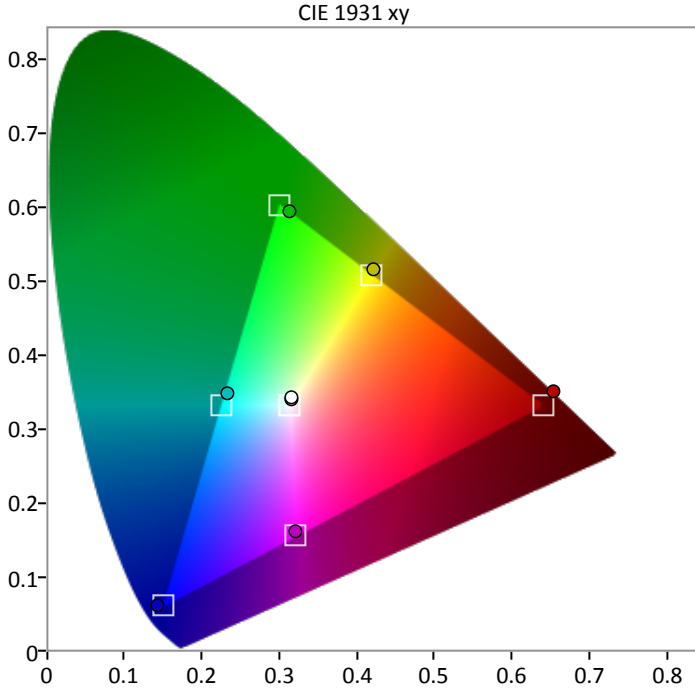

Post Calibration Results

