

Gorm Sørensen

ProCal



ProCal - Gorm Sørensen

Sandshagan 11
Jessheim, N 2067

Gorm Sørensen

Telefon: +47 41 51 61 71

Epost: gorm@procal.no


ISF level II certified

THX level II video calibrator

Lyd&Bilde Sony VPL-VW300ES

Telefon:

Epost:

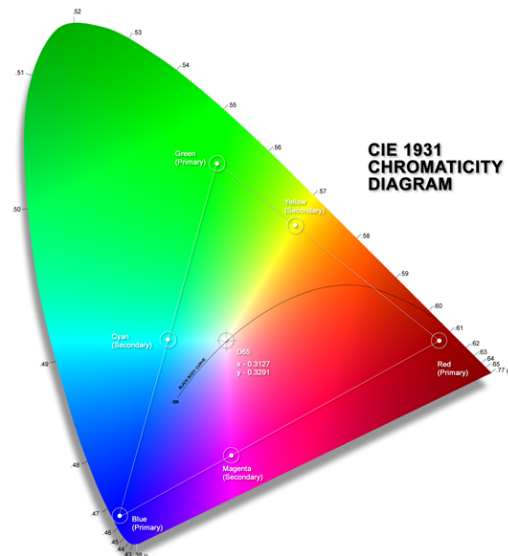

METER Klein Instruments K Series

Manufacturer: Klein Instruments
Model: K-10
Meter Serial: 00100004

SOURCE AV Foundry VideoForge

Model: AV Foundry - VideoForge Classic (Ethernet @9021)
Info: VideoForge software

DISPLAY / PROCESSOR Direct Display Control

Model: None
Type:
Info1:

CALIBRATION STANDARD

Nominal Signal Levels: True
Luminance Response Model: PowerFunction
Gamma: 2.2
Color Space Target: D65, HD Rec.709

Pre Calibration Settings

PictureMode: Cinema Film 1
 ColorTemp: D65
 Gamma: 7
 BackLight:
 Brightness: 50 Contrast: Max
 Color: 50 Tint: 50
 Sharpness: 30

High

Red	Green	Blue
0	0	0

Low

Red	Green	Blue
0	0	0

Pre-Calibration Notes: default Cinema Film 1

Post Calibration Settings

Picture Mode: Cinema Film 1
 ColorTemp: Custom 3
 Gamma: 2.2
 BackLight:
 Brightness: 52 Contrast: 94
 Color: 50 Tint: 50
 Sharpness: 20

High

Red	Green	Blue
-12	-5	0

Low



Red	Green	Blue
0	0	1

Post-Calibration Notes: Kalibrert minne: Cinema Film 1


Lampe: High (normal)
 ColorSpace: BT709
 CMS er kalibrert
 Reality Creation er redusert til 10 (resolution)
 Motion Enhancer: True Cinema
 Contrast Enhancer: Low

Pre Calibration Results

CollectionMax dE2000: 4.5

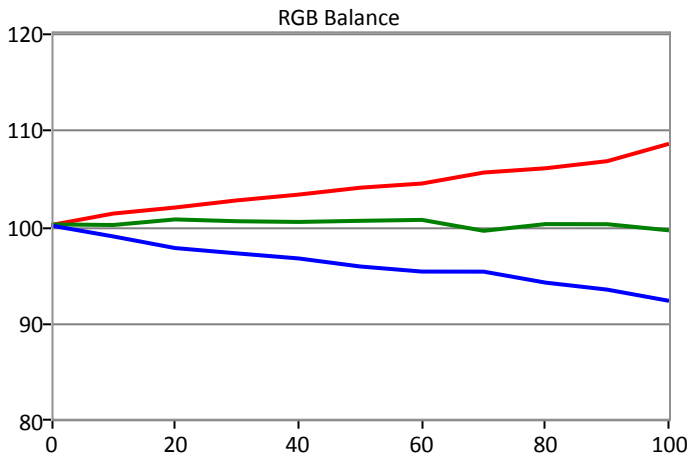
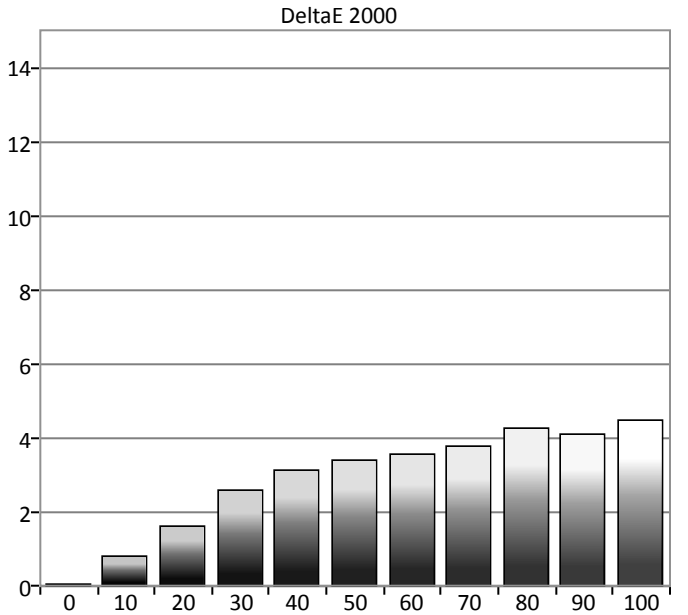


Total Gamma: 2.02

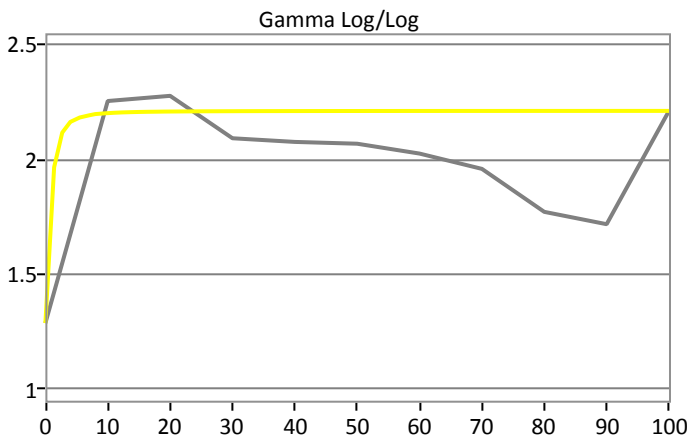


Post Calibration Results




CollectionMax dE2000: 0.93

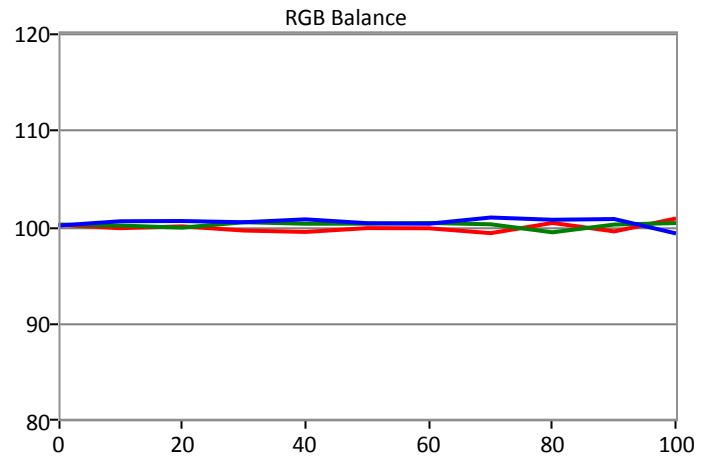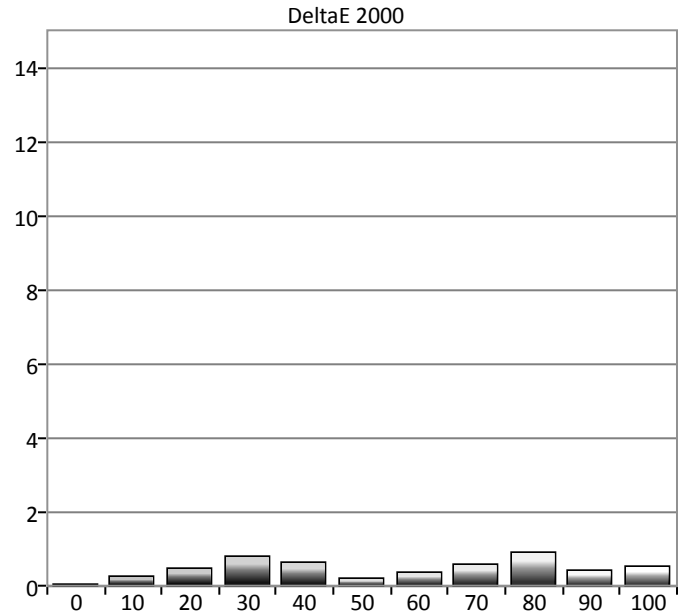

Total Gamma: 2.21

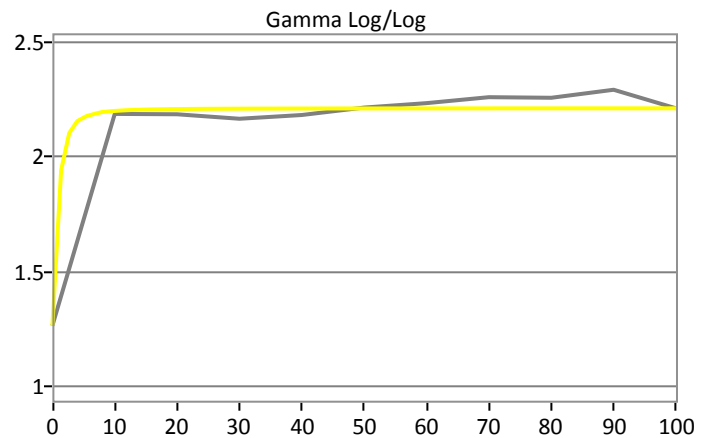

Pre Calibration Results

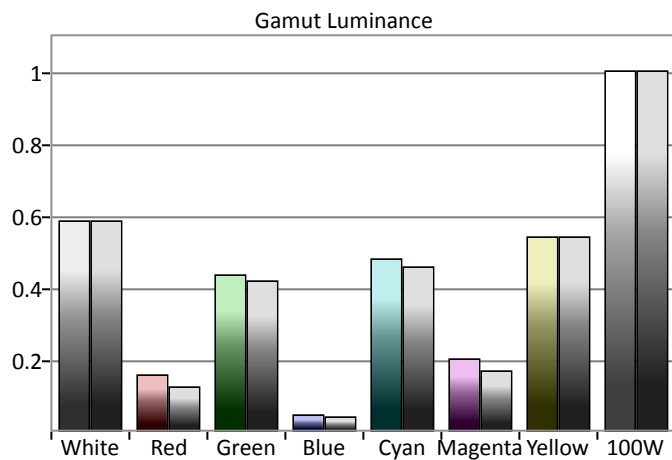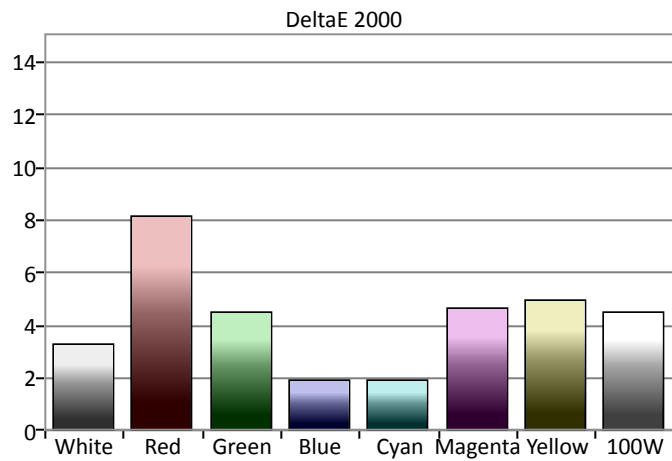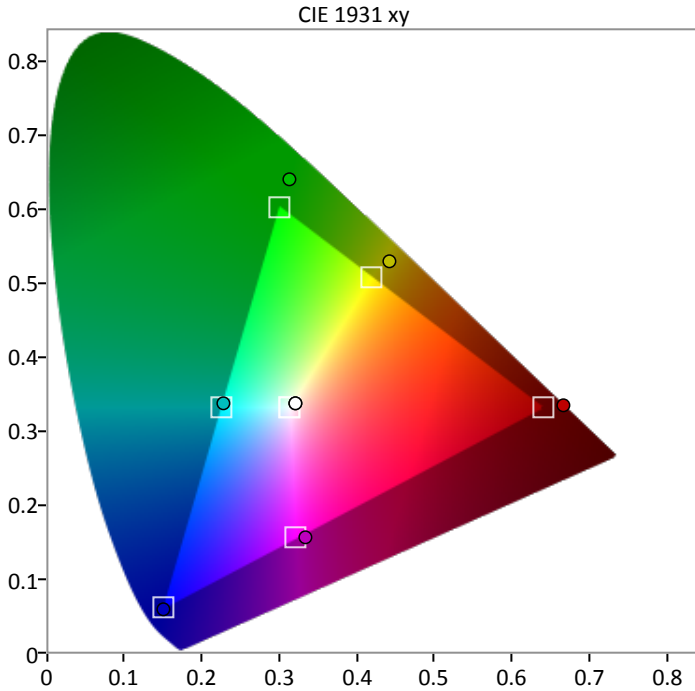

Post Calibration Results

